
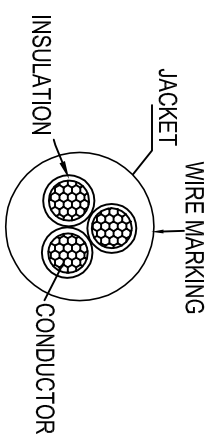


ROHS COMPLIANT

A/0

DATE	REV	DESCRIPTION	BY	CHECK
	A/0			

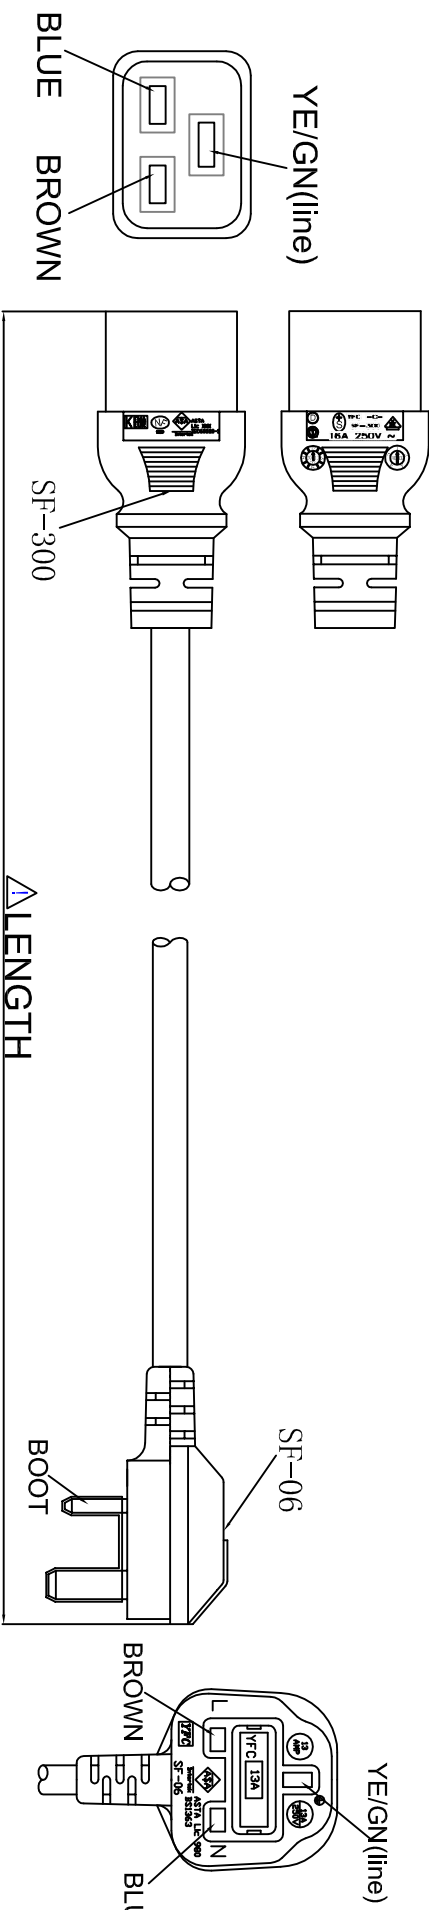

NO.	ITEM	LENGTH
1	42 0565-2.5m	2500 ± 35MM
2	42 0577-5m	5000 ± 65MM

ELECTRIC TESTING:
 1. 100% OPEN & SHORT TESTING.
 3. VOLTAGE RATING:AC ≥2000V/S
 4. PLUG(SF-06) RATED POWER:250V 13A
 5. PLUG(SF-300) RATED POWER:250V 16A
 6. WIRE: H05VV-F 3*1.5 RATED VOLTAGE:300/500V
 7. COLOR:BLACK

WIRE MARKING: + 0 + 0 + 0 KEMA+KEUR (VDE) (N) (E) Δ CEBEC 972 ◀ VDE NF-USE 1345 (HOLLOW) IEMMEQU H05VV-F 3G1.5MM ² V-79 300/500V ORDINARY DUTY N SW17436 YFC BONE-EAGLE			
Conductor 導體	Insulation 絕緣體	Jacket 被覆體	Overall diameter 完成外徑
Resistance maximum mm ² 最大電阻(≤) 1.5 (29/0.246) at 20°C: 13.3ohms/km	Min. Thick 最小厚度 0.53mm	Diameter 絕緣外徑 3.0±0.1mm	Min. Thick 最小厚度 0.67mm
	Length of Lay 芯絞 130 ↓ mm	Min. Thick 最小厚度 0.9mm	AVG. Thick 平均厚度 0.9mm
			8.3±0.1mm

(NOTE: IF THE CONDUCTORS O.D IS GO BEYOND THE SCOPE, THE RESISTANCE OF CONDUCTOR IS STANDARD THEN)



PAGE	1/1	重點尺寸		⚠	
Unless specified on the drawing, tolerances are per the follows:					
X ± 0.1		SCALE		MM	
.XX ± 0.05		UNIT		MM	
3RD		PATH NAME		//D//業務	
DESCRIPTION		CUSTOMER NAME		CUSTOMER NO.	
H05VV-F3G1.5 SF-06+SF-300		cablenet			
DRAW		CHECK		DATE	
APPROVAL		WUXIAO		2011/11/02	
DATE		DATE		DATE	

J
H
G
F
E
D
C
B
A

J
H
G
F
E
D
C
B
A

1 2 3 4 5 6 7 8 9 10 11 12 13